
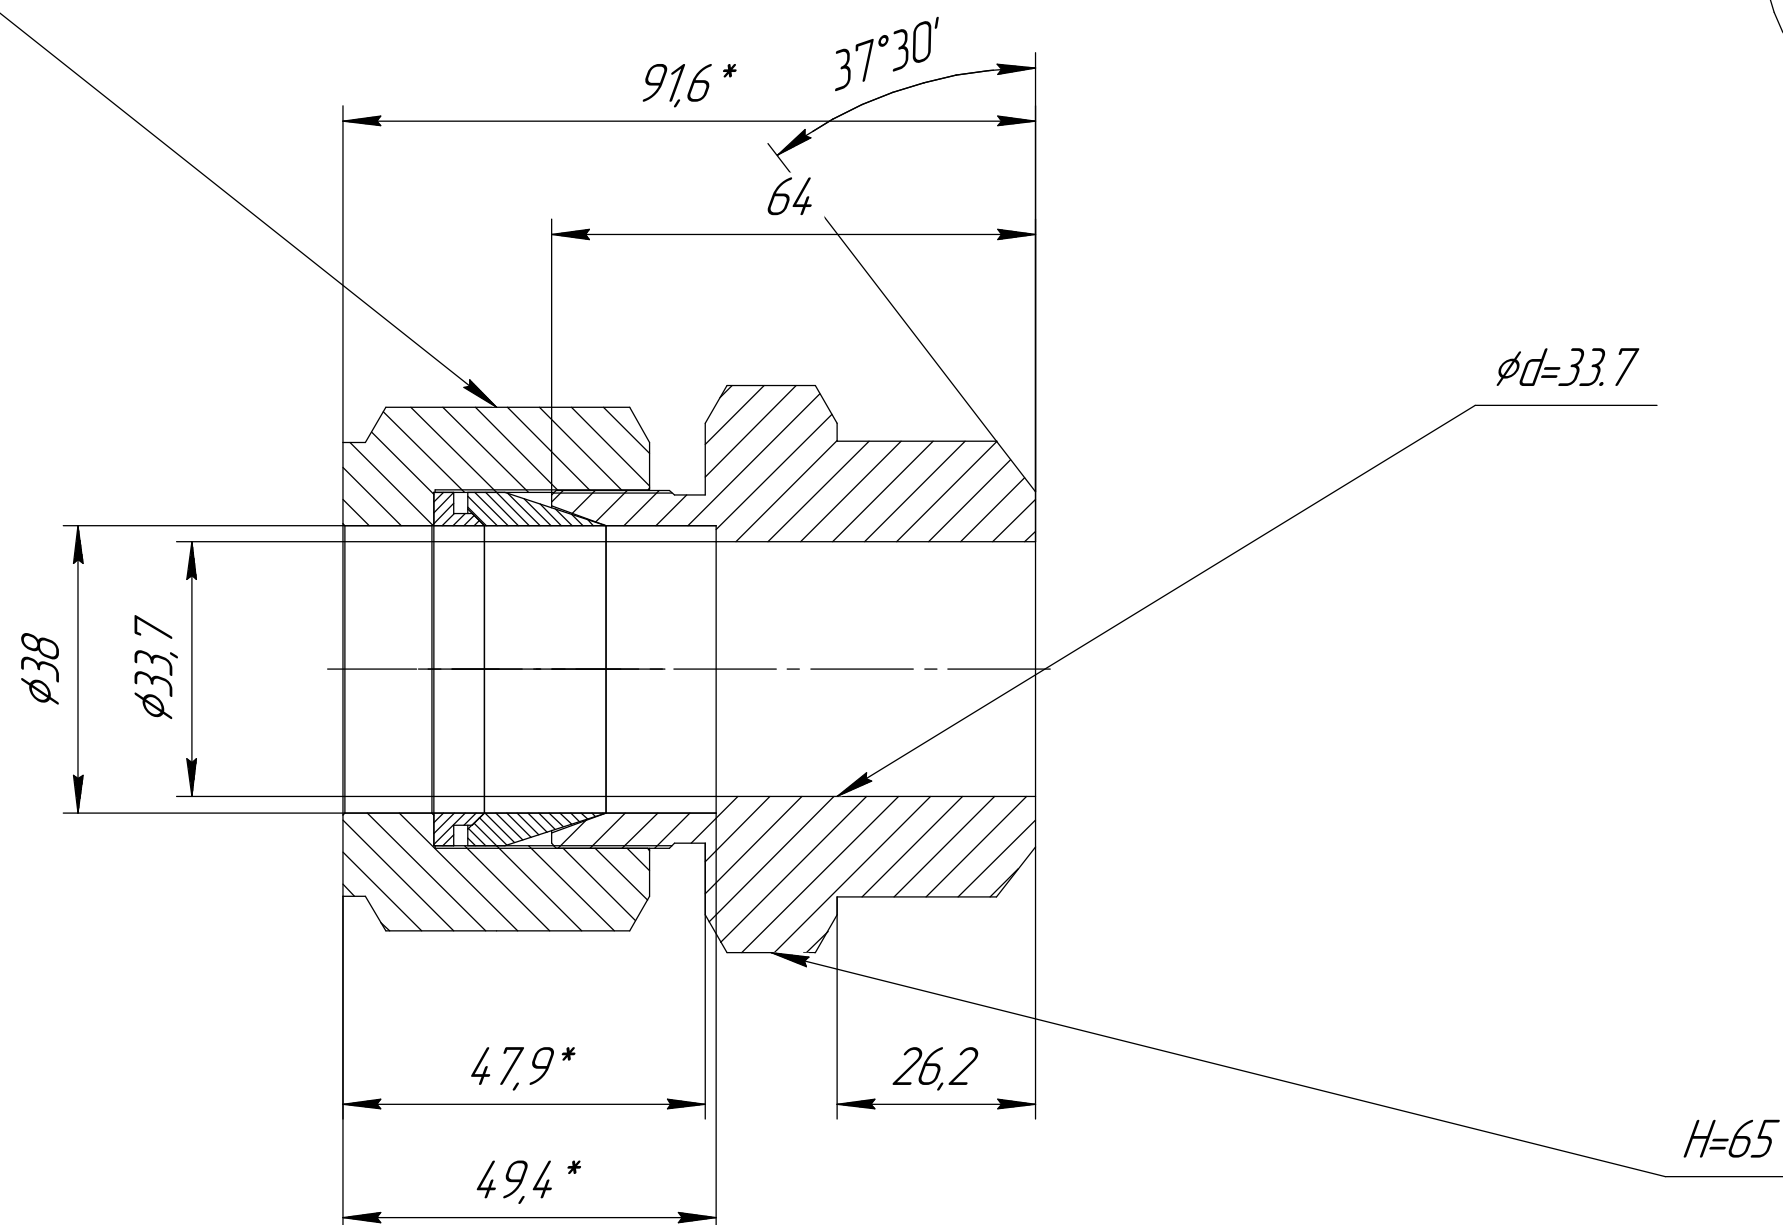


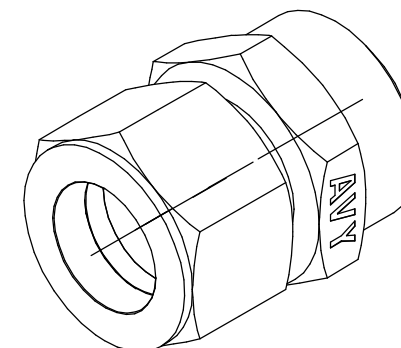

1. *H and h1 – Hex sizes*
2. **This size may depend on the degree of tightening*
- 3 *Temperature rating from -196 to 649°C*

					<i>CWC-38M-32P.AVY.ORG</i>							
<i>Ch.</i>	<i>Sheet</i>	<i>Nº doc.</i>	<i>Sign.</i>	<i>Date</i>	<i>Butt weld fitting</i>	<i>Char.</i>		<i>Weight</i>		<i>Scale</i>		
<i>Develop.</i>										<i>1:1</i>		
<i>Checked</i>												
<i>Tech. contr.</i>						<i>Sheet</i>		<i>Sheets</i>		<i>1</i>		
<i>Reg. contr.</i>						<i>HY-LOK CORPORATION</i>						
<i>Approv.</i>												