
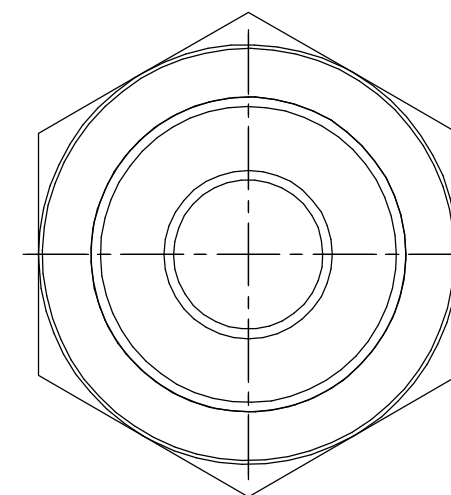


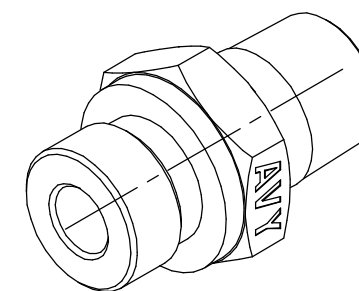

1. *H* – Hex size
2. Temperature rating from  $-196$  to  $649^{\circ}\text{C}$

|              |         |       |      |  |                                     |  |  |  |       |        |       |       |
|--------------|---------|-------|------|--|-------------------------------------|--|--|--|-------|--------|-------|-------|
|              |         |       |      |  | H-SNA-6NG.A VY.ORG                  |  |  |  |       |        |       |       |
|              |         |       |      |  |                                     |  |  |  |       |        |       |       |
|              |         |       |      |  | Соединитель с<br>наружными резьбами |  |  |  | Char. | Weight | Scale |       |
| Ch. Sheet    | Nº doc. | Sign. | Date |  |                                     |  |  |  |       |        |       | 2.5:1 |
| Develop.     |         |       |      |  |                                     |  |  |  |       |        |       |       |
| Checked      |         |       |      |  |                                     |  |  |  |       |        |       |       |
| Tech. contr. |         |       |      |  |                                     |  |  |  |       |        |       |       |
|              |         |       |      |  |                                     |  |  |  | Sheet | Sheets | 1     |       |
| Reg. contr.  |         |       |      |  | HY-LOK CORPORATION                  |  |  |  |       |        |       |       |
| Approv.      |         |       |      |  |                                     |  |  |  |       |        |       |       |