
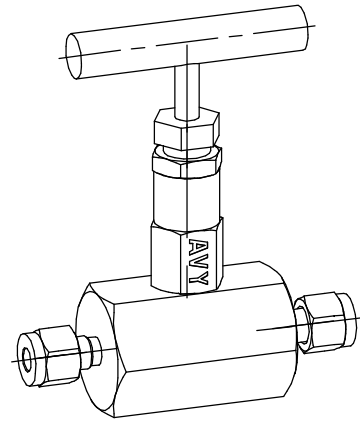
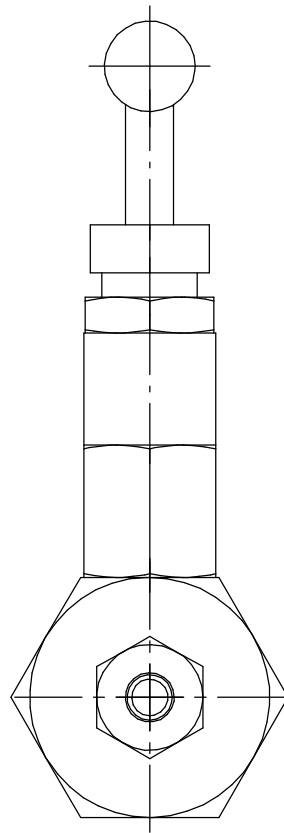


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. N° orig. | Sign. and date | Exch. inv. N° | Inv. N° copy | Sign. and date | Reference N° | First mention |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|

SVH2-H-6M-G.AVY.ORG

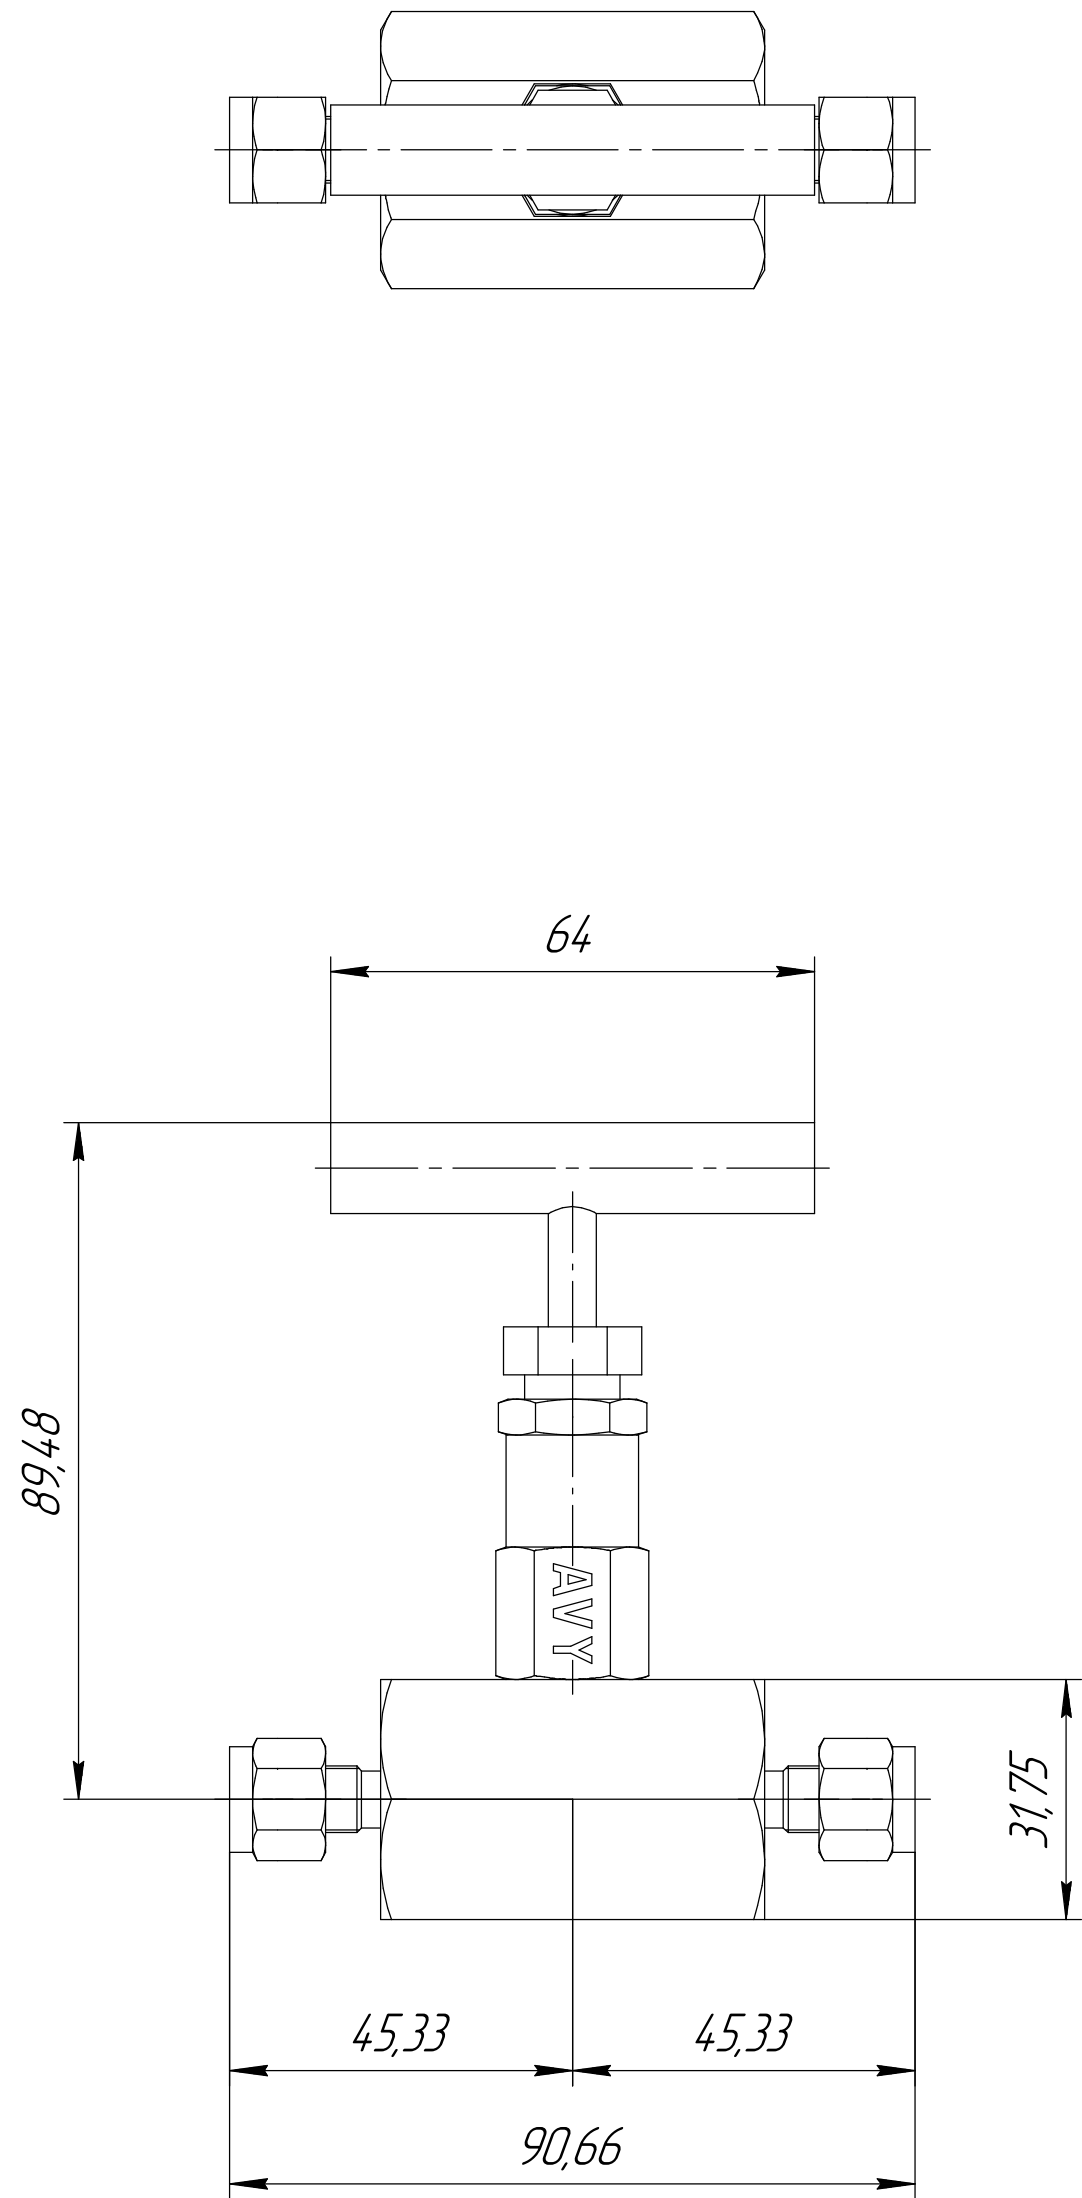

1 Pressure rating 414bar (T = 21 °C)  
2 Temperature rating from -54 to 648°C

|              |         |       |      |  |  |                     |       |        |       |   |
|--------------|---------|-------|------|--|--|---------------------|-------|--------|-------|---|
|              |         |       |      |  |  | SVH2-H-6M-G.AVY.ORG |       |        |       |   |
|              |         |       |      |  |  | Needle valve        | Char. | Weight | Scale |   |
| Ch. Sheet    | Nº doc. | Sign. | Date |  |  |                     |       |        | 1:1   |   |
| Develop.     |         |       |      |  |  |                     |       |        |       |   |
| Checked      |         |       |      |  |  |                     |       |        |       |   |
| Tech. contr. |         |       |      |  |  |                     | Sheet | Sheets |       | 1 |
| Req. contr.  |         |       |      |  |  | HY-LOK CORPORATION  |       |        |       |   |
| Approv.      |         |       |      |  |  |                     |       |        |       |   |