
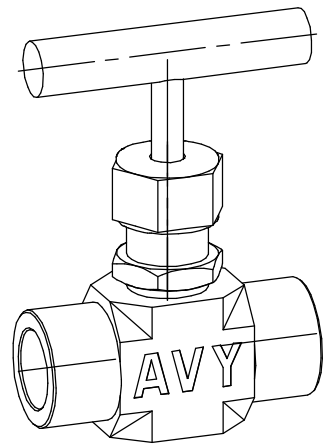


|              |                |              |             |                |             |               |
|--------------|----------------|--------------|-------------|----------------|-------------|---------------|
| Inv. № orig. | Sign. and date | Exch. inv. № | Inv. № copy | Sign. and date | Reference № | First mention |
|--------------|----------------|--------------|-------------|----------------|-------------|---------------|

NV4-F-8R-PK.AVY.ORG

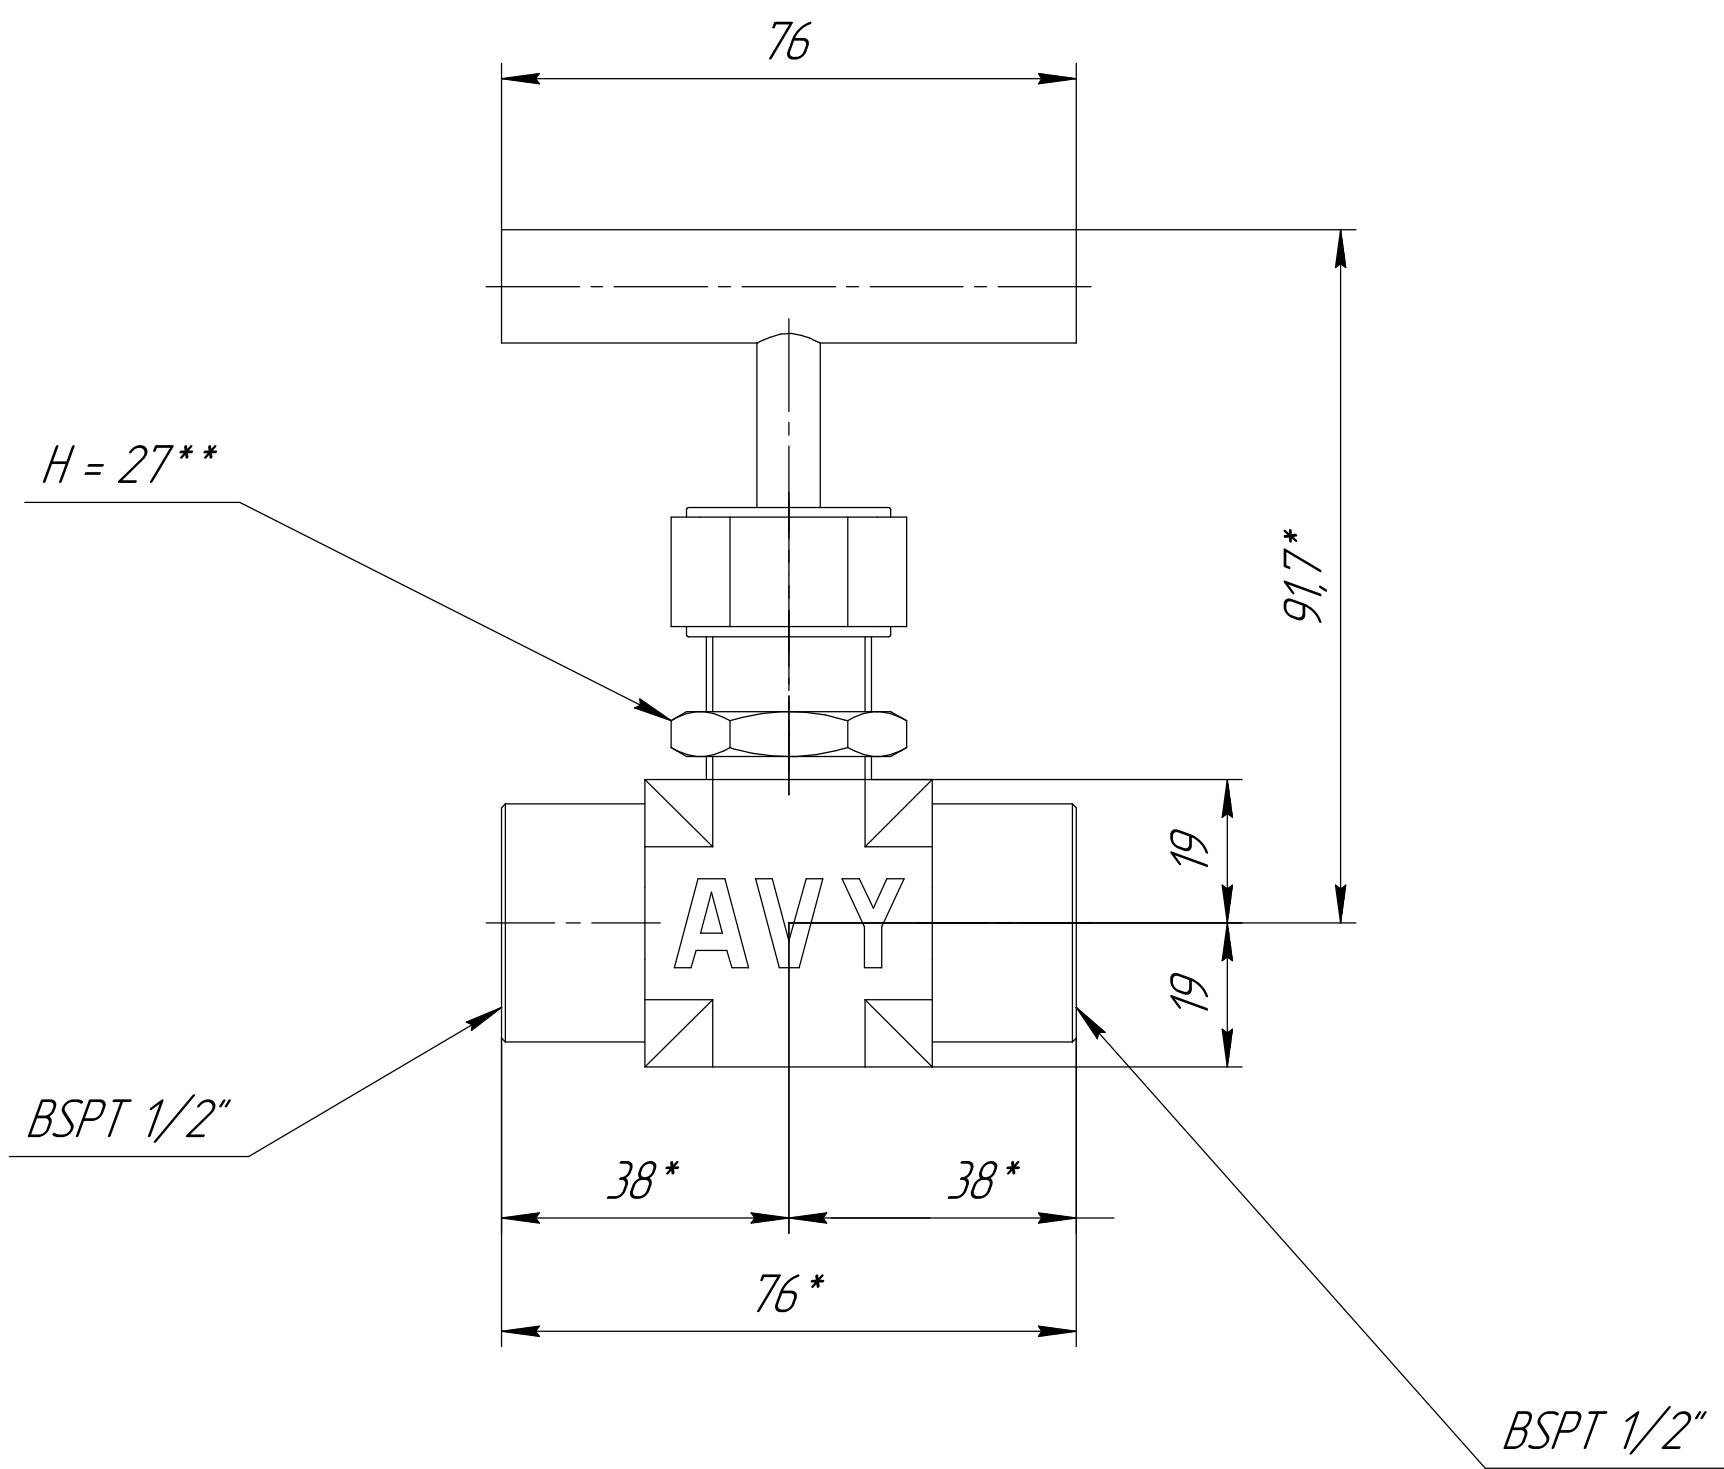

- \*This size may depend on the degree of tightening zaŭku
- Pressure rating 413bar (T = 21 °C)
- Temperature rating from -54 to 316°C
- Needle V-shaped

|                     |         |       |      |  |  |                    |  |  |       |        |       |
|---------------------|---------|-------|------|--|--|--------------------|--|--|-------|--------|-------|
| NV4-F-8R-PK.AVY.ORG |         |       |      |  |  | Needle valve       |  |  | Char. | Weight | Scale |
| Ch. Sheet           | Nº doc. | Sign. | Date |  |  |                    |  |  |       |        | 1:1   |
| Develop.            |         |       |      |  |  |                    |  |  |       |        |       |
| Checked             |         |       |      |  |  |                    |  |  |       |        |       |
| Tech. contr.        |         |       |      |  |  |                    |  |  |       |        |       |
| Req. contr.         |         |       |      |  |  |                    |  |  |       |        |       |
| Approv.             |         |       |      |  |  |                    |  |  |       |        |       |
| Copied              |         |       |      |  |  | HY-LOK CORPORATION |  |  |       |        |       |
|                     |         |       |      |  |  | Format A2          |  |  |       |        |       |