
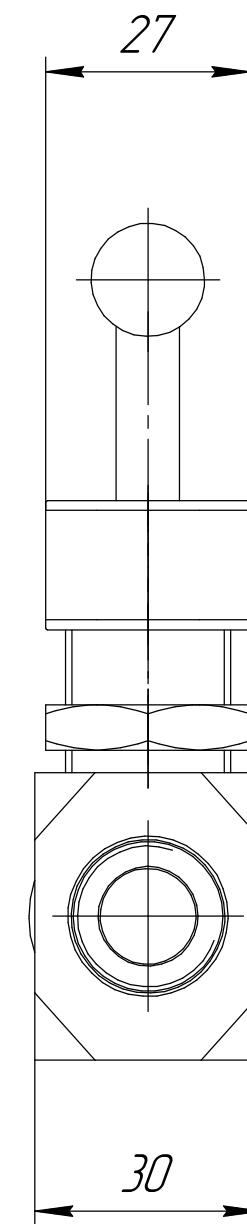
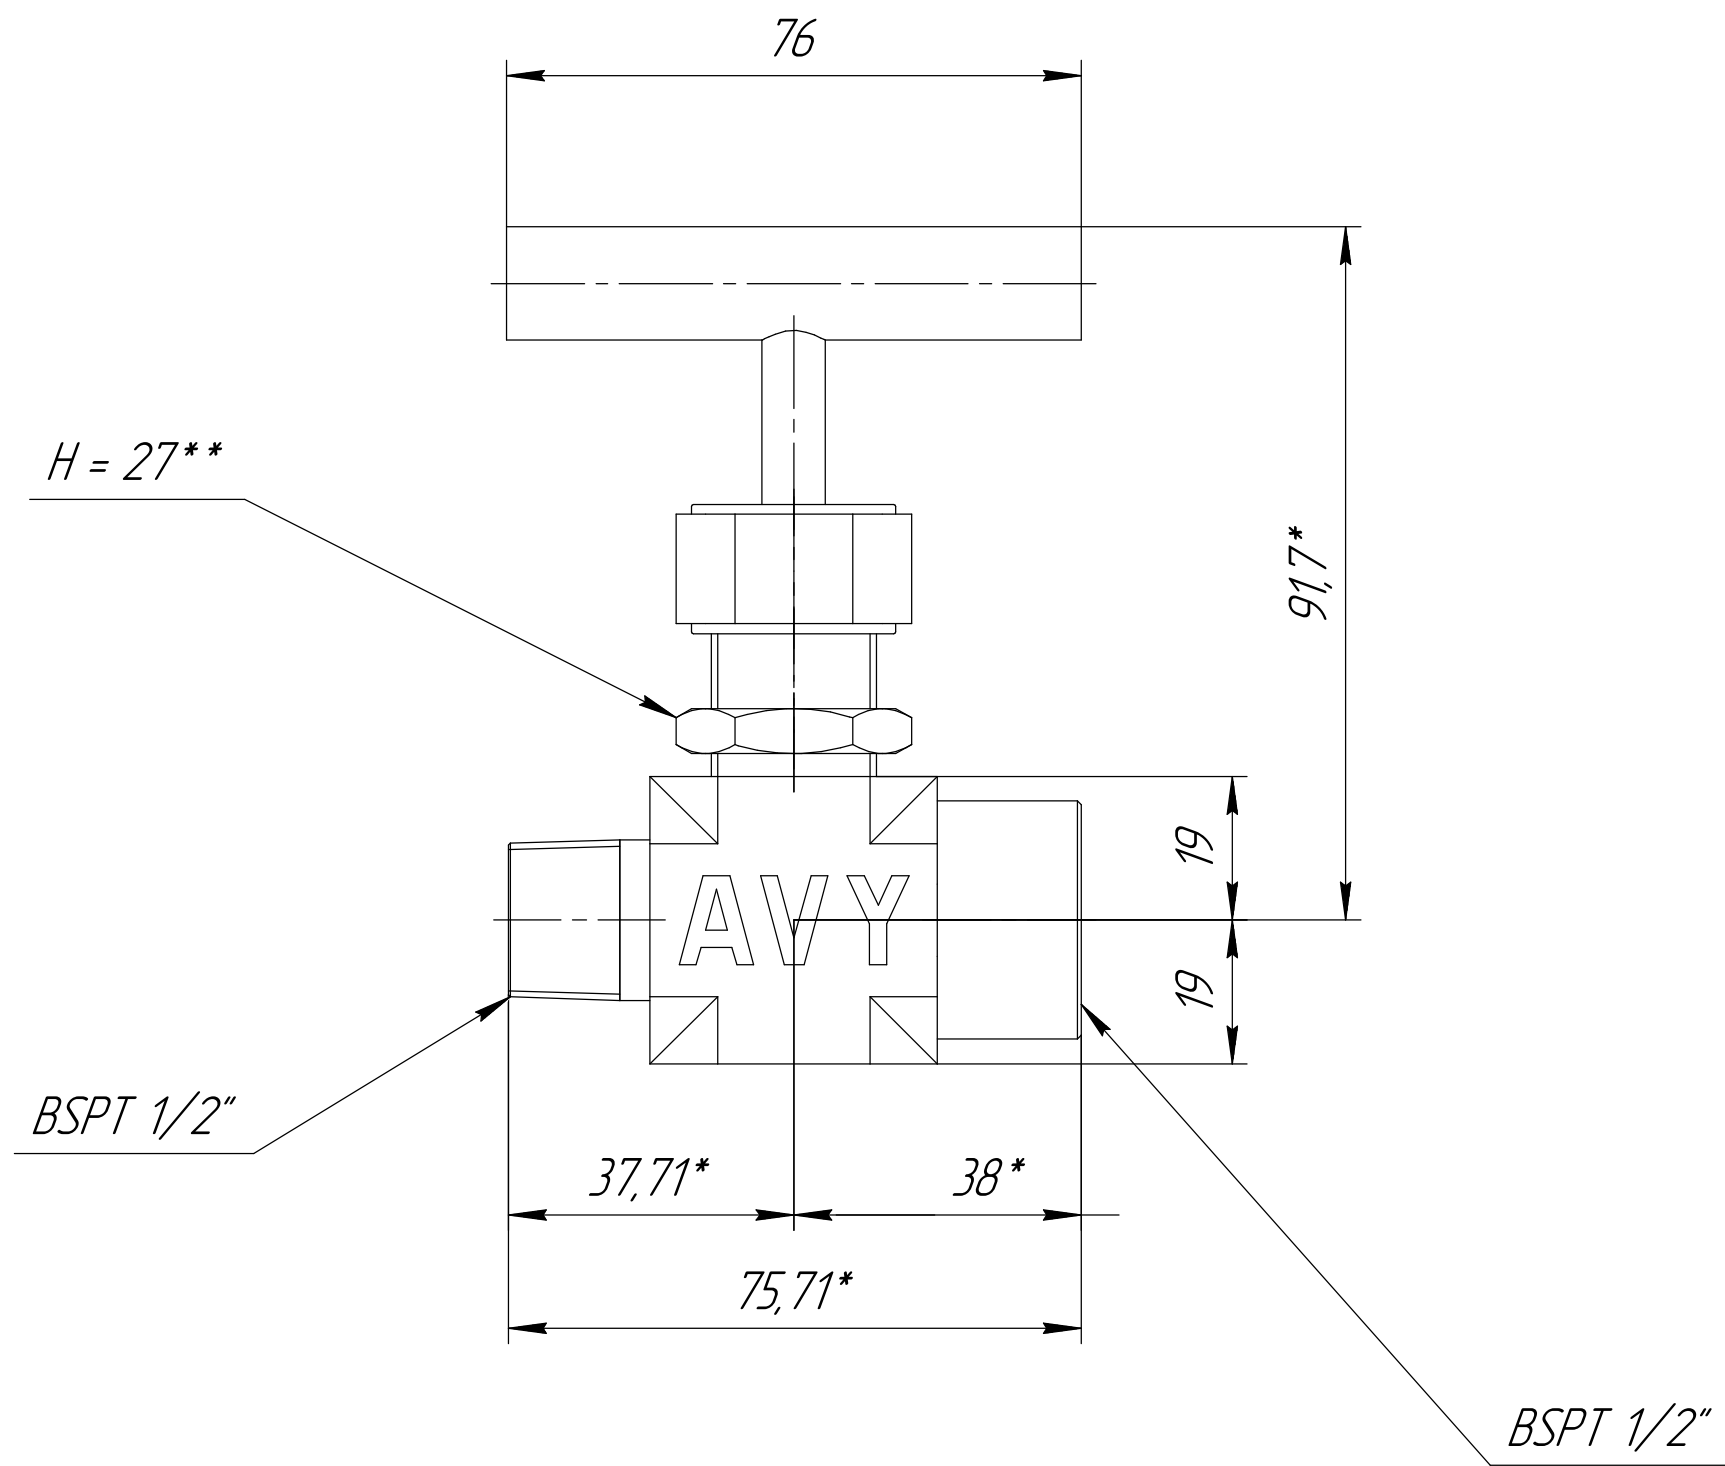
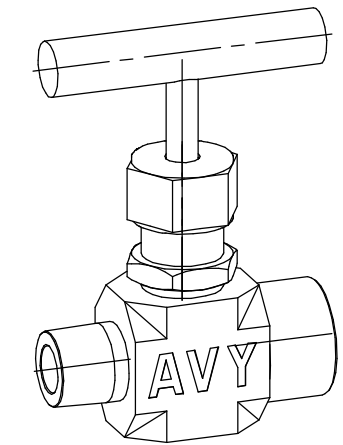


NV4-M-F-8R-S.AVY.ORG

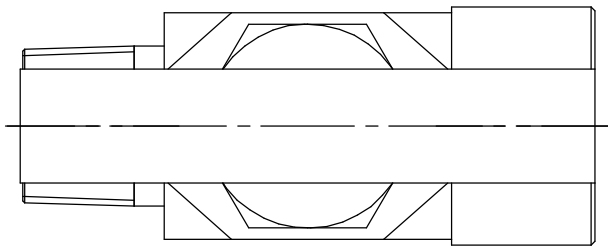

1. *\*This size may depend on the degree of tightening zaŭku*
- 2 *Pressure rating 413bar (T = 21 °C)*
- 3 *Temperature rating from -54 to 93°C*

|              |         |       |      |  |  |                      |                    |        |       |
|--------------|---------|-------|------|--|--|----------------------|--------------------|--------|-------|
|              |         |       |      |  |  | NV4-M-F-8R-S.AVY.ORG |                    |        |       |
|              |         |       |      |  |  | Needle valve         | Char.              | Weight | Scale |
| Ch. Sheet    | Nº doc. | Sign. | Date |  |  |                      |                    |        | 1:1   |
| Develop.     |         |       |      |  |  |                      |                    |        |       |
| Checked      |         |       |      |  |  |                      | Sheet              | Sheets | 1     |
| Tech. contr. |         |       |      |  |  |                      |                    |        |       |
| Reg. contr.  |         |       |      |  |  |                      | HY-LOK CORPORATION |        |       |
| Approv.      |         |       |      |  |  |                      |                    |        |       |
| Copied       |         |       |      |  |  |                      | Format A2          |        |       |