
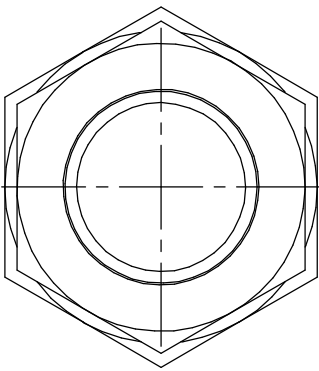
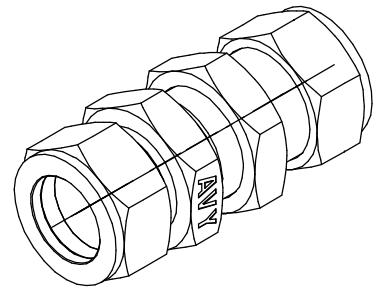


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. N° orig. | Sign. and date | Exch. inv. N° | Inv. N° copy | Sign. and date | Reference N° | First mention |
|               |                |               |              |                |              |               |

CBU-16.AVY.ORG

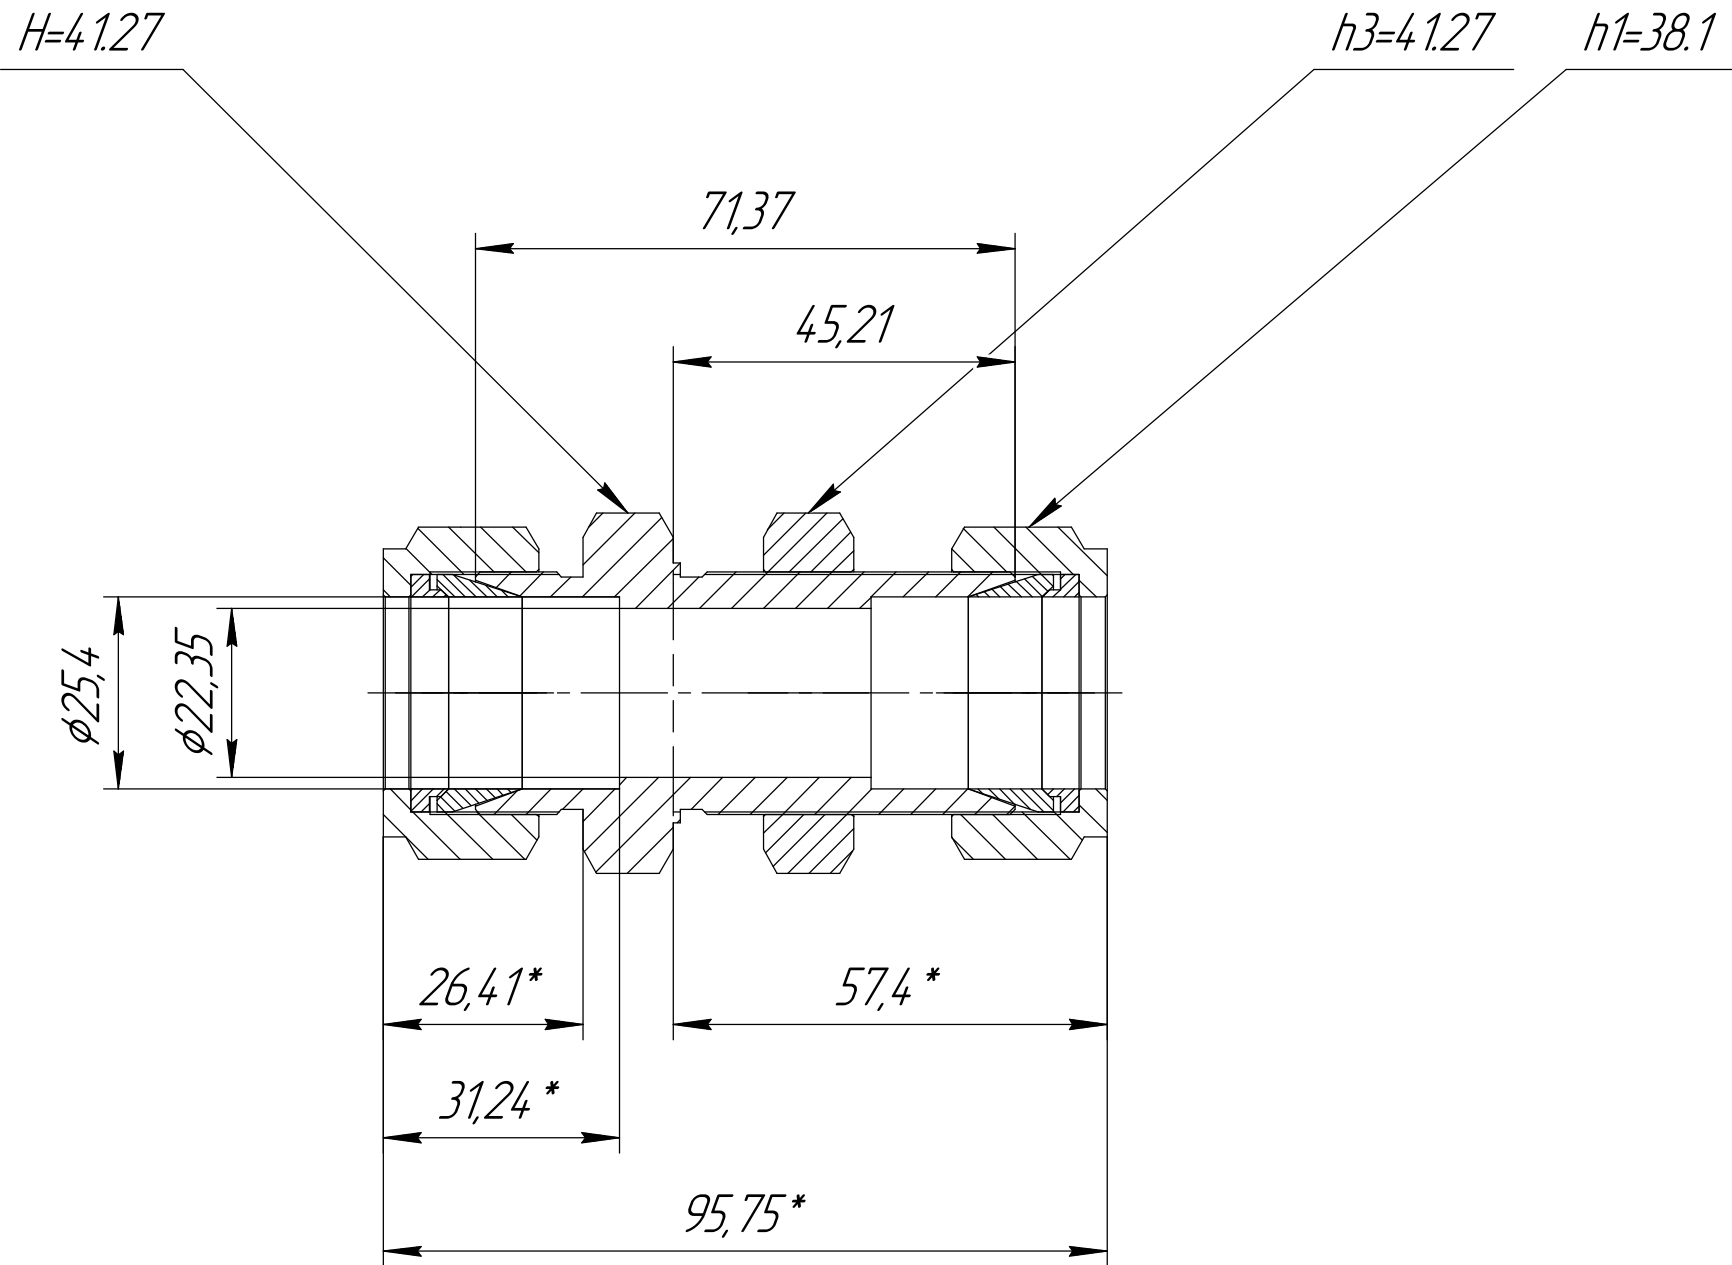

1. H, h1 and h3 – Hex sizes
2. \*This size may depend on the degree of tightening
- 3 Temperature rating from -196 to 649°C

|              |         |       |      |                       |                    |        |       |
|--------------|---------|-------|------|-----------------------|--------------------|--------|-------|
|              |         |       |      |                       | CBU-16.AVY.ORG     |        |       |
| Ch. Sheet    | N° doc. | Sign. | Date | Panel Mount Connector | Char.              | Weight | Scale |
| Develop.     |         |       |      |                       |                    |        | 1:1   |
| Checked      |         |       |      |                       |                    |        |       |
| Tech. contr. |         |       |      |                       | Sheet              | Sheets | 1     |
| Req. contr.  |         |       |      |                       |                    |        |       |
| Approv.      |         |       |      |                       |                    |        |       |
|              |         |       |      |                       | HY-LOK CORPORATION |        |       |

Copied

Format A3