
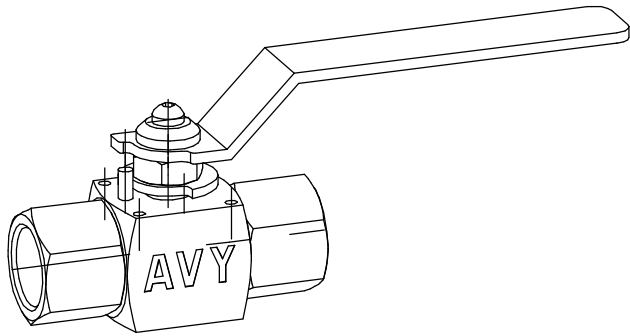
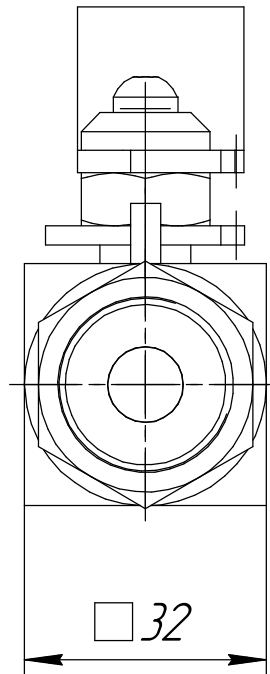


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. Nº orig. | Sign. and date | Exch. inv. Nº | Inv. Nº copy | Sign. and date | Reference Nº | First mention |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|

H1B-F-8G-PC-ML.AVY.ORG

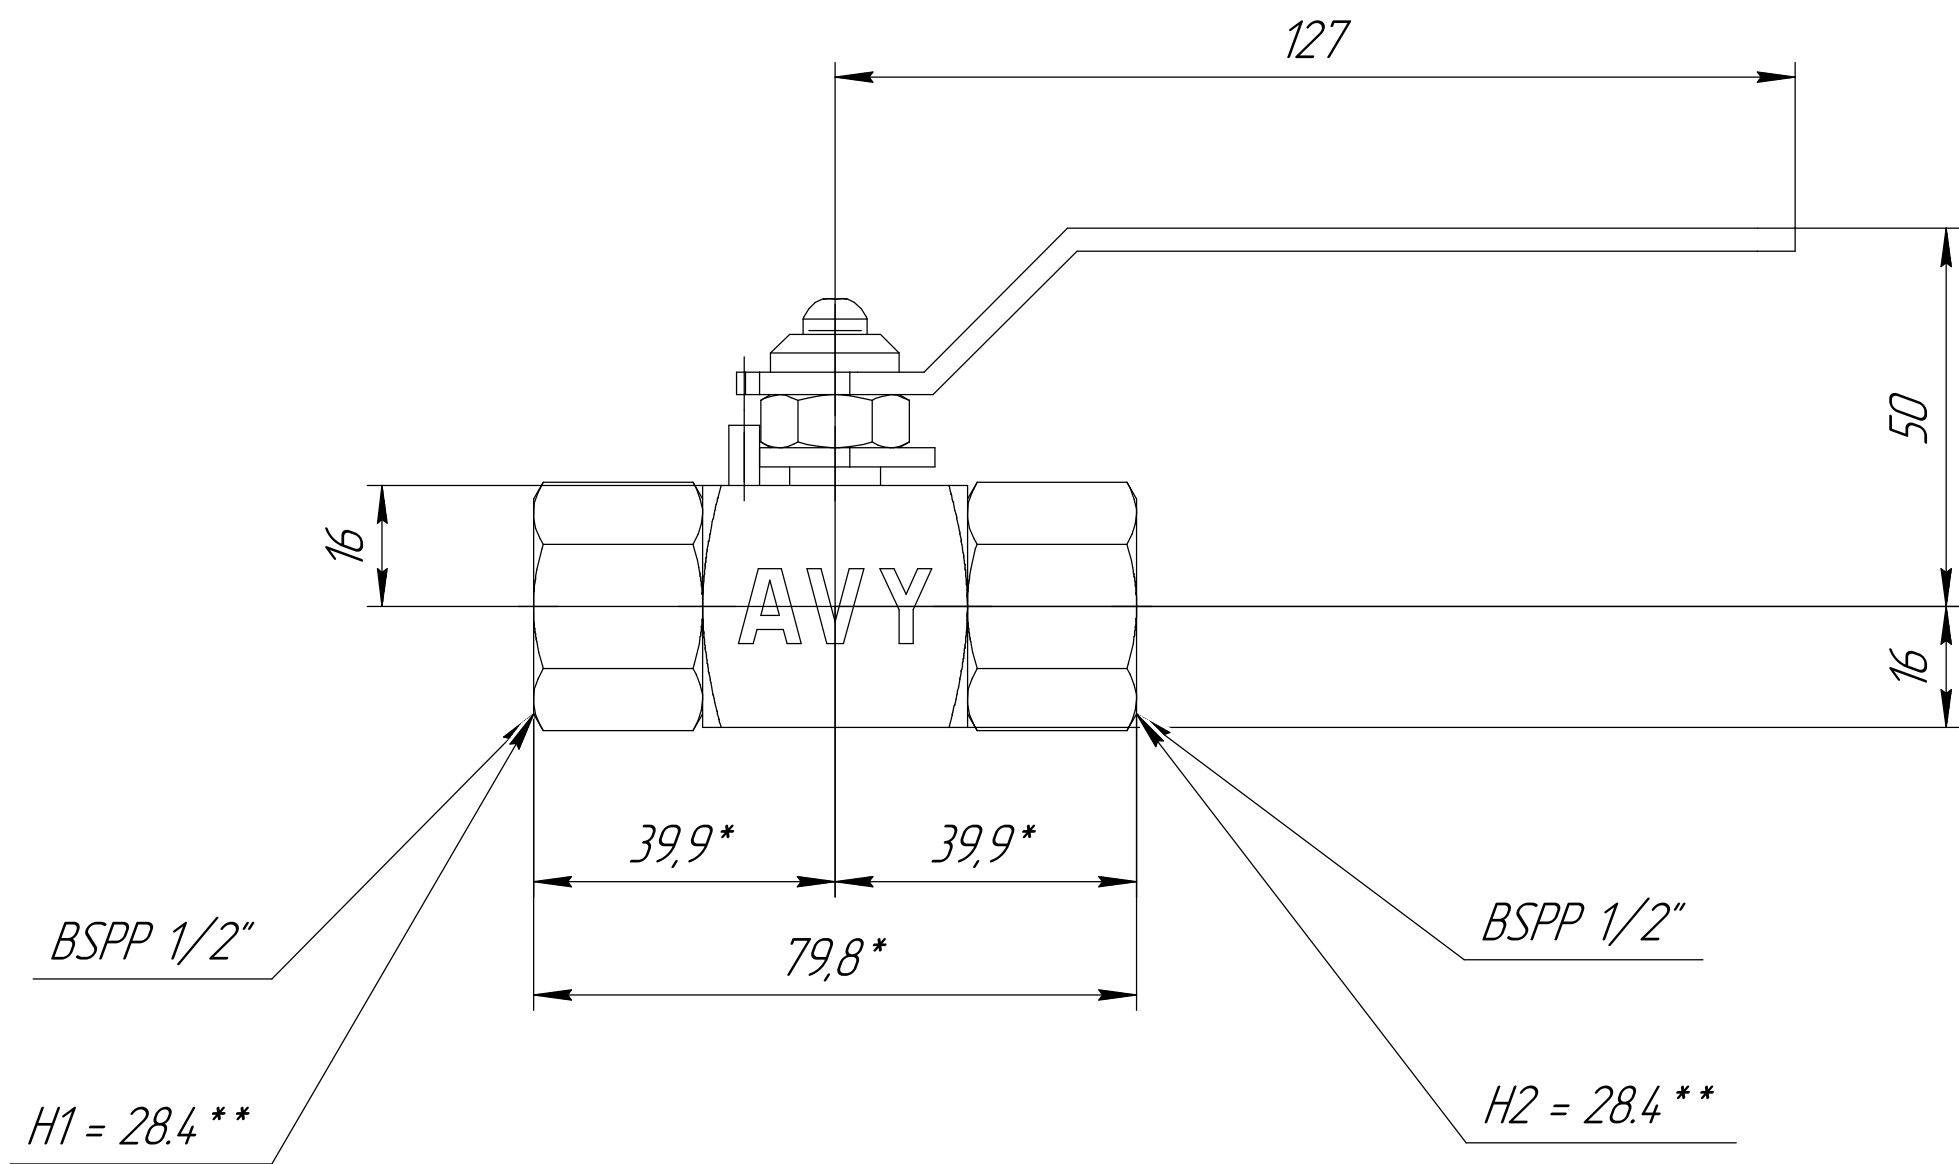

- 1. \*This size may depend on the degree of tightening
- 2. \*\* Hex size
- 3 Pressure rating 414bar (T = 21 °C)
- 4 Temperature rating from -54 to 260°C

|              |         |       |      |  |                        |       |          |       |  |
|--------------|---------|-------|------|--|------------------------|-------|----------|-------|--|
|              |         |       |      |  | H1B-F-8G-PC-ML.AVY.ORG |       |          |       |  |
|              |         |       |      |  | Ball Valve             | Char. | Weight   | Scale |  |
| Ch. Sheet    | Nº doc. | Sign. | Date |  |                        |       |          | 1:1   |  |
| Develop.     |         |       |      |  |                        |       |          |       |  |
| Checked      |         |       |      |  |                        |       |          |       |  |
| Tech. contr. |         |       |      |  |                        | Sheet | Sheets 1 |       |  |
| Req. contr.  |         |       |      |  | HY-LOK CORPORATION     |       |          |       |  |
| Approv.      |         |       |      |  |                        |       |          |       |  |