
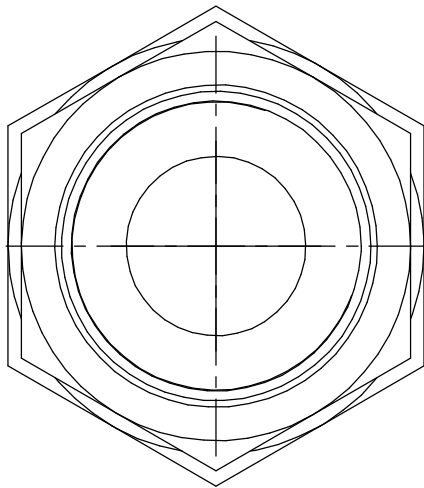
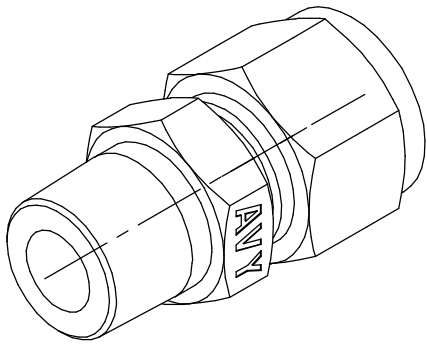


|               |                |               |              |                |              |               |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|
| Inv. N° orig. | Sign. and date | Exch. inv. N° | Inv. N° copy | Sign. and date | Reference N° | First mention |
|---------------|----------------|---------------|--------------|----------------|--------------|---------------|

CMC-12M-6R.AVY.ORG

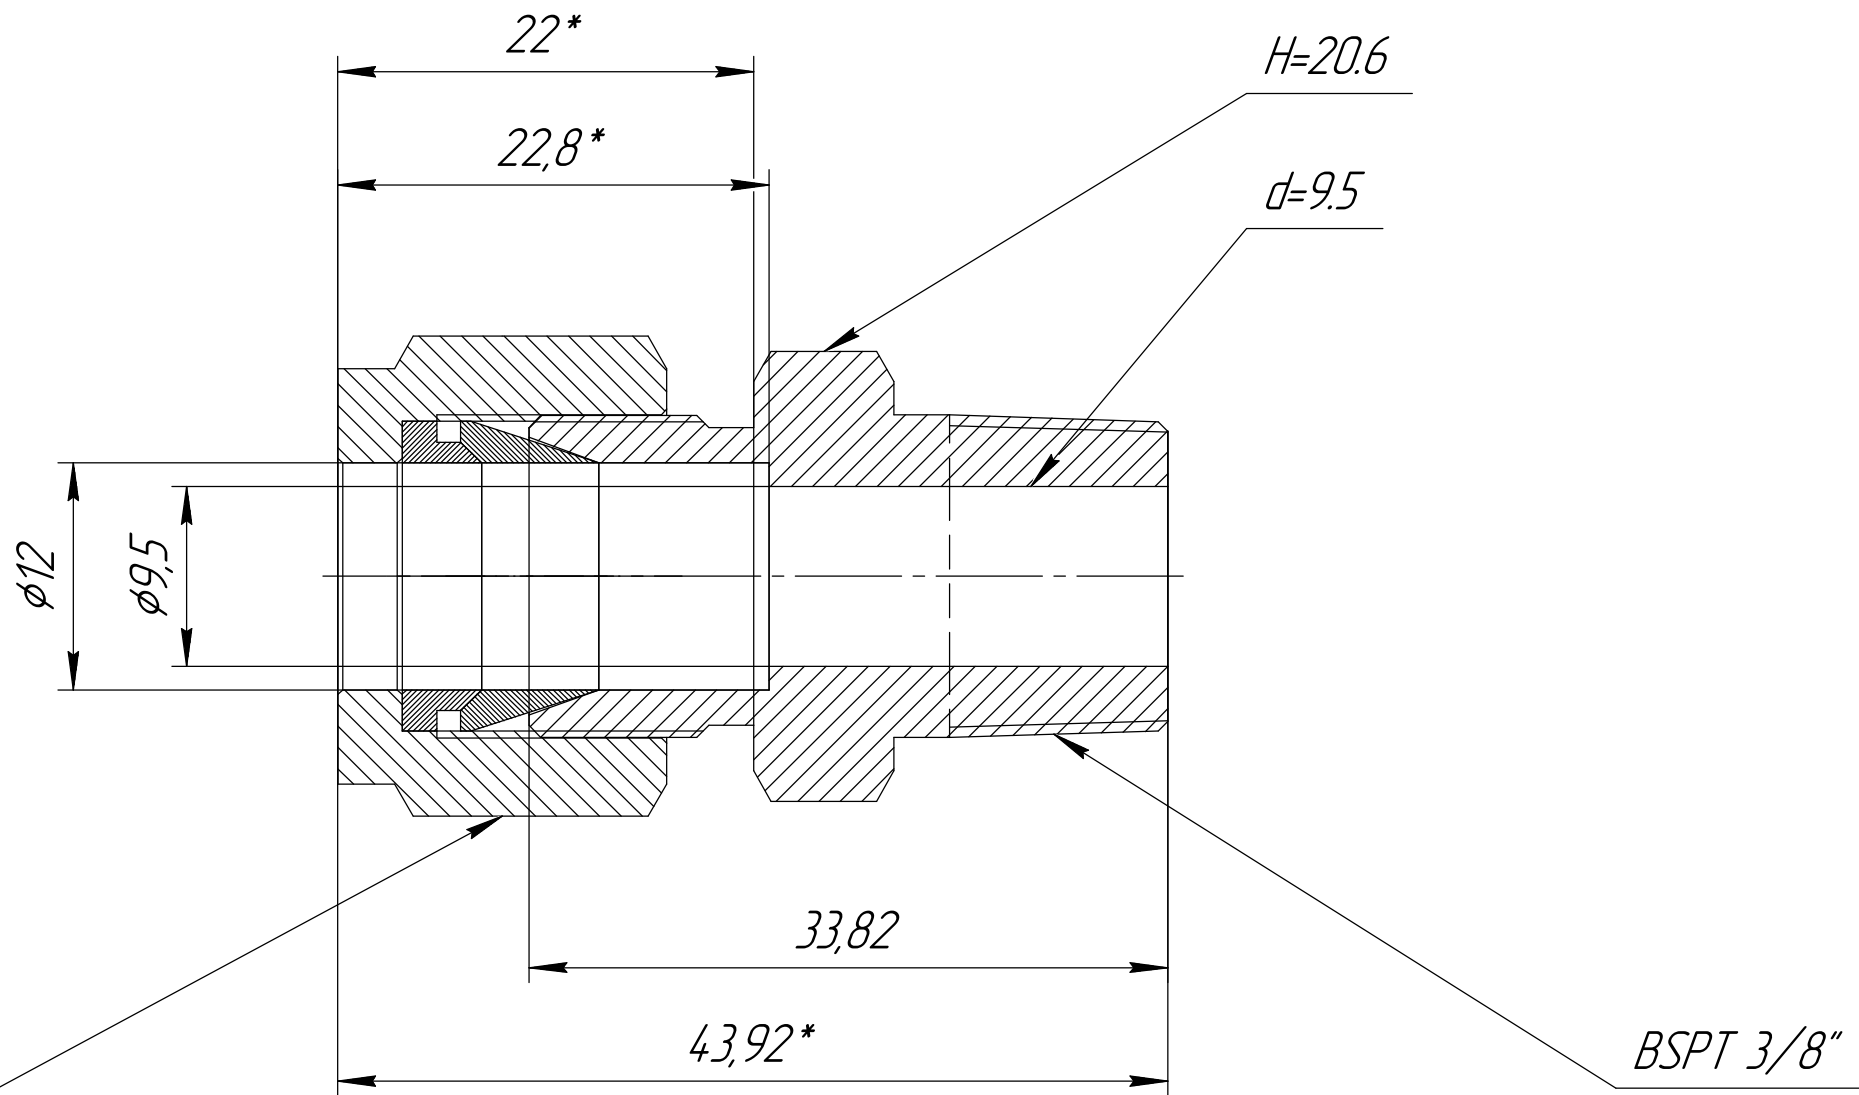

1. H and h1 – Hex sizes
2. \*This size may depend on the degree of tightening
- 3 Temperature rating from -196 to 64 9°C

|              |         |       |      |  |                    |                    |        |       |
|--------------|---------|-------|------|--|--------------------|--------------------|--------|-------|
|              |         |       |      |  | CMC-12M-6R.AVY.ORG |                    |        |       |
| Ch. Sheet    | N° doc. | Sign. | Date |  | Male Connector     | Char.              | Weight | Scale |
| Develop.     |         |       |      |  |                    |                    |        | 2.5:1 |
| Checked      |         |       |      |  |                    |                    |        |       |
| Tech. contr. |         |       |      |  |                    | Sheet              | Sheets | 1     |
| Req. contr.  |         |       |      |  |                    | HY-LOK CORPORATION |        |       |
| Approv.      |         |       |      |  |                    |                    |        |       |

Copied

Format A3